



# Environmental product declaration

in accordance with ISO 14025:2006 and EN15804:2012+A2:2019/AC:2021

## Pre-stressed concrete sleeper GB-212-22

Programme: The International EPD® System [www.environdec.com](http://www.environdec.com)

Programme operator: EPD International AB

Regional Programme: EPD Australasia [www.epd-australasia.com](http://www.epd-australasia.com)

EPD Registration no. EPD-IES-0025154:001

Date of issue 2025-09-30 | Validity date 2030-09-30

*EPD of a single product from a manufacturer (from one location)*

*An EPD may be updated or depublished if conditions change.*

*To find the latest version of the EPD and to confirm its validity, see [www.environdec.com](http://www.environdec.com)*



## Table of Contents

<b>General information</b> .....	<b>3</b>
<b>Information about the EPD owner</b> .....	<b>4</b>
<b>Product information</b> .....	<b>5</b>
Physical Properties .....	5
Product codes .....	6
Technical compliance .....	6
Geographical scope .....	6
<b>Content declaration</b> .....	<b>7</b>
<b>LCA information</b> .....	<b>8</b>
Declared unit .....	8
Scope of the Environmental Product Declaration .....	8
Description of Life cycle stages .....	10
Raw Material Supply (A1) .....	10
Transport (A2) .....	10
Manufacturing (A3) .....	10
End of Life (C1-C4) .....	10
Loads and Benefits Beyond the System Boundaries (D) .....	11
Background Data .....	11
Data quality assessment .....	12
Key assumptions .....	13
Cut-off criteria .....	13
Allocation .....	13
<b>Life Cycle Assessment (LCA) indicators</b> .....	<b>14</b>
<b>Environmental performance</b> .....	<b>16</b>
Additional scenarios .....	20
<b>Abbreviations</b> .....	<b>22</b>
<b>Version history</b> .....	<b>22</b>
<b>References</b> .....	<b>23</b>
<b>Contact information</b> .....	<b>24</b>

### Disclaimer

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## General information

An Environmental Product Declaration (EPD) is a standardised way of quantifying the potential environmental impacts of a product or system. EPDs are produced according to a consistent set of rules – Product Category Rules (PCR) – that define the requirements within a given product category. These rules are a key part of ISO 14025 as they enable transparency and comparability between EPDs. This EPD provides environmental indicators for Vossloh’s GB-212-22 concrete sleepers produced in Geelong, Victoria. This EPD is a “cradle-to-gate with modules C1-C4, D” declaration covering cradle-to-gate production of the products, plus their end-of-life. This EPD is verified to be compliant with EN 15804+A2. EPDs of construction products may not be comparable if they do not comply with EN15804. EPDs within the same product category but from different programs or utilising different standards or PCRs may not be comparable. Vossloh Sleeper Technologies Australia Pty Ltd is part of the Vossloh Group (Vossloh). Vossloh, as the EPD owner, has the sole ownership, liability, and responsibility for the EPD.

<b>EPD Program Operator (Regional programme)</b>	<b>EPD Program Operator</b> <b>EPD International AB</b> Box 210 60, SE-100 31 Stockholm, Sweden <a href="http://www.environdec.com">www.environdec.com</a> <a href="mailto:support@environdec.com">support@environdec.com</a>	<b>Regional programme</b> <b>EPD Australasia Limited</b> Address: 6 Cube Court, Richmond 7020, New Zealand <a href="http://www.epd-australasia.com">www.epd-australasia.com</a> <a href="mailto:info@epd-australasia.com">info@epd-australasia.com</a>	 INTERNATIONAL EPD SYSTEM  AUSTRALASIA INTERNATIONAL EPD SYSTEM
<b>EPD registration number:</b>	EPD-IES-0025154:001		
<b>Published:</b>	2025-09-30	<b>Valid until:</b>	2030-09-30 (5 years)
<b>Reference year for data:</b>	2021-01-01 – 2021-12-31 (manufacturing process data) Note: product designs and compositions are representative for 2025		

<b>Product Category Rules</b>	<b>CEN standard EN 15804 served as the core Product Category Rules (PCR)</b>
<b>PCR:</b>	PCR 2019:14 Construction Products, Version 2.0.1, 2025-06-05, valid until 2030-04-07
<b>PCR review was conducted by:</b>	The Technical Committee of the International EPD® System. See <a href="http://www.environdec.com">www.environdec.com</a> for a list of members. Review chair: Rob Rouwette   start2see (chair), Noa Meron   thinkstep-anz (co-chair) The review panel may be contacted via the Secretariat: <a href="http://www.environdec.com/contact">www.environdec.com/contact</a> .
<b>c-PCR:</b>	c-PCR-003 (to 2019:14) Concrete and concrete elements, version 2025-04-08

<b>Third-party verification:</b>	Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: <input checked="" type="checkbox"/> Individual EPD verification without a pre-verified LCA/EPD tool
<b>Third party verifier: Approved by EPD Australasia Ltd</b>	Andrew D. Moore, Life Cycle Logic <a href="http://www.lifecyclelogic.com.au">www.lifecyclelogic.com.au</a> <a href="mailto:andrew@lifecyclelogic.com.au">andrew@lifecyclelogic.com.au</a> +61 4 2432 0057
<b>Procedure for follow-up of data during EPD validity involves third-party verifier:</b>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No



## Information about the EPD owner

Vossloh Sleeper Technologies Australia (VSTA) has become a world leader in the design and manufacture of precast concrete sleepers, and the largest concrete sleeper manufacturer in Australia. Since 2018 VSTA has been wholly owned by the Vossloh Group whose core business is rail infrastructure.

Vossloh Sleeper Technologies Australia is focused on offering the best in sleeper design and manufacture while providing clients in Australia a channel to the Vossloh Group suite of rail solutions. At our core we are railway people.



“Throughout the world Vossloh offer integrated rail solutions from a single source; significantly contributing to the safe, reliable and sustainable movement of people and commodities around the world”

This EPD covers GB-212-22 sleepers that Vossloh supplies from Geelong in Australia.

Declaration Owner:

**Vossloh Sleeper Technologies Australia (VSTA)**  
GPO Box 606  
BRISBANE QLD 4001 Australia  
+61 7 3328 5400  
[VSTA@vossloh.com](mailto:VSTA@vossloh.com)



LCA Accountability:

**start2see Pty Ltd**  
U8, 2-4 Kensington Rd, South Yarra, VIC 3141, Australia  
[www.start2see.com.au](http://www.start2see.com.au)  
[Rob.Rouwette@start2see.com.au](mailto:Rob.Rouwette@start2see.com.au)  
+61 403 834 470



## Product information

Prestressed concrete sleepers are installed in rail networks on a bed of ballast and function is to evenly transfer load from rolling stock to the ballast and hold the rail at the correct gauge. Concrete sleepers are comprised of steel wire, Portland Cement, supplementary cementitious materials, sand and aggregates along with chemical admixtures to aid production.

This EPD covers a prestressed, Broad Gauge sleeper design manufactured by Vossloh in Geelong, VIC.

**Product code:** GB-212-22



Figure 1. GB-212-22 Concrete sleeper – fastenings and shoulders not shown

Fastening attachment components comprised of steel or plastic are used to secure steel rail to the sleeper body and are typically cast into the concrete during production. However, each monoblock sleeper design can be customised with a range of fastening designs options depending on the rail network design requirements. The environmental footprints of specific fastening configurations have been omitted from this EPD and should be evaluated separately to the concrete sleeper body.

## Physical Properties

Technical data	GB-212-22	Units
Length	2 600	mm
Width	282	mm
Height (At Rail Seat Centre)	212	mm
Nominal Weight per sleeper*	301	kg
Track Gauge**	1 600	mm
Design Life	50	years
Fastening System	client-specified***	

Table 1: Physical properties of GB-212-22 sleepers

\* Excludes fastening system.

\*\* Broad Gauge track width.

\*\*\* A range of fastening options are available, including e-Clip, FastClip and Vossloh fastening systems

# Environmental product declaration

Pre-stressed concrete sleeper GB-212-22



## Product codes

The product code for sleepers is **UN CPC 37550** (Prefabricated structural components for building or civil engineering, of cement, concrete or artificial stone) and **ANZSIC 20340** (Railway sleepers manufacturing – concrete).

## Technical compliance

Vossloh sleeper products comply with relevant technical specifications such as AS1085.14:2019 (Railway Track Material, Part 14: Prestressed concrete sleepers).

## Geographical scope

The processes in modules A1-A3 have been modelled to represent concrete sleeper production in Geelong, Victoria, Australia. The raw materials are mostly sourced from within Australia, with only reinforcement steel being predominantly sourced from overseas. The products are sold on the Australian market, and therefore the end-of-life (module C) of the product has been modelled to represent Australia as well (based on the default scenario).



## Content declaration

The product composition is presented in Table 2. For reasons of confidentiality, a range is provided.

Product Components	Mass, kg	Post-consumer recycled material (weight-% of product)	Biogenic material, (weight-% of product)	Biogenic material, kg C/product or declared unit
Cement	42 to 52	0%	0%	0
Fly ash	10 to 19	0%	0%	0
Coarse aggregates	126 to 136	0%	0%	0
Natural sand	94 to 110	0%	0%	0
Admixtures*	0 to 1	0%	0%	0
Water	16 to 23	0%	0%	0
Reinforcement steel wire**	6 to 16	0%	0%	0
<b>Total</b>	<b>323</b>	<b>0%</b>	<b>0%</b>	<b>0</b>

Table 2: Product Composition, concrete sleepers per Declared Unit (1 unit of precast concrete sleeper)

\* Although admixtures (set accelerator, water reducer) are below the mass cut-off, they have been considered in this LCA.

\*\* Reinforcement steel wire contains recycled content, but our suppliers do not necessarily report the overall share of recycled content, and whether this is pre-consumer or post-consumer recycled content. The PCR requires declaration of zero percent if unknown.

Timber gluts are used beneath concrete sleepers during storage and transport to keep them off the ground, preventing damage from impact or moisture, and to allow space for forklifts or lifting equipment to handle the sleepers safely and efficiently. The quantity per sleeper is shown in Table 3.

Packaging materials	Mass, kg	Mass -% (versus the product)	Biogenic material, kg C/product or declared unit
Timber gluts	1.89	0.58%	0.85

Table 3: Packaging Composition, per Declared Unit (1 unit of precast concrete sleeper)

In this LCA, fly ash is considered a secondary material. The sleepers do not contain any biogenic carbon. The biogenic carbon present in the timber gluts is balanced in module A1-A3.

The product included in this EPD does not contain any substances of very high concern as defined by European REACH regulation\* in concentrations >0.1% (m/m) (ECHA 2025). Dust from this product is classified as Hazardous according to the Approved Criteria for Classifying Hazardous Substances 3<sup>rd</sup> Edition (NOHSC 2004). Concrete products are classified as non-dangerous goods according to the Australian Code for the Transport of Dangerous Goods by Road and Rail. When concrete products are cut, sawn, abraded or crushed, dust is created which contains crystalline silica, some of which may be respirable (particles small enough to go into the deep parts of the lung when breathed in), and which is hazardous. Exposure through inhalation should be avoided.

\* Regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18 December 2006 concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals.

## LCA information

### Declared unit

The declared unit is “1 unit of precast reinforced concrete sleeper”.

The declared unit covers a sleeper of specific dimensions (see the Product information section). The mass of GB-212-22 sleepers is 323 kg per unit.

The sleepers can be set up with various types of clips and shoulders (i.e. “jewellery”). This EPD covers a concrete sleeper without clips and shoulders. For the environmental impact of jewellery, please check with the manufacturer of these materials.

### Scope of the Environmental Product Declaration

This EPD covers the cradle-to-gate with modules C1–C4 and module D (modules A1-A3, C1-C4, D).

Construction and use stages have not been included as we cannot define a typical scenario for our range of Concrete sleepers. These impacts are best determined at project level.

The modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation are shown in Table 4.

Stages	Product Stage			Construction Stage		Use Stage							End-of-life Stage				Benefits beyond system boundary
	Raw Materials	Transport	Production	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction/Demolition	Transport	Waste Processing	Disposal	Reuse, recovery, recycling potential
Modules	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
				Scenario		Scenario							Scenario				Scenario
Modules Declared	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	AU	AU	AU										AU	AU	AU	AU	AU
Share of primary data	60%																
Variation products	0% (n/a)																
Variation sites	0% (n/a)																

Table 4: Scope of the EPD

X = module is included in this study

ND = module is not declared. When a module is not accounted for, the stage is marked with “ND” (Not Declared)

ND is used when we cannot define a typical scenario

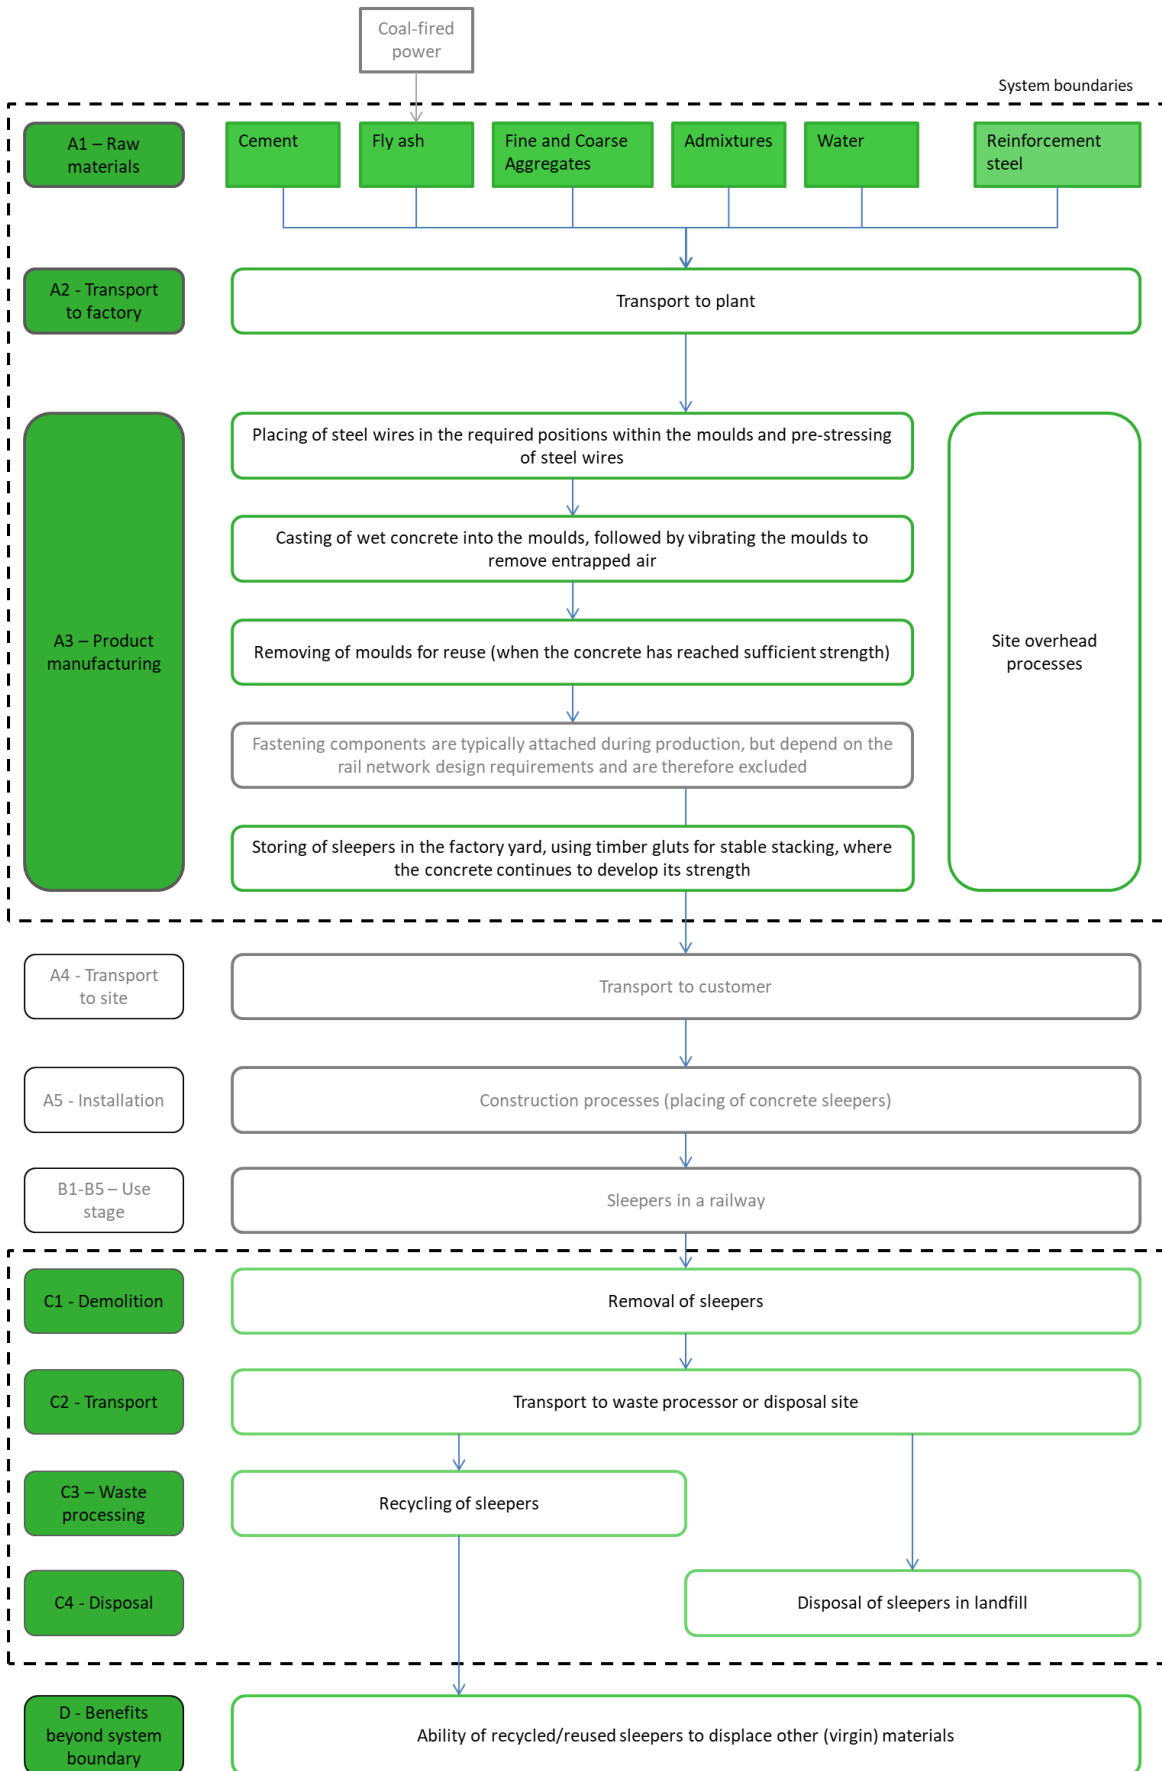


Figure 2: System Boundary Diagram of Sleeper Products

### Description of Life cycle stages

#### Raw Material Supply (A1)

Extraction and processing of raw materials results in environmental impacts from the use of energy and resources, as well as from process emissions and waste. The two main inputs used to produce reinforced concrete sleepers are concrete and steel reinforcement wire (refer to Table 2 for specific product components). Concrete is a mixture of cementitious binders (cement and fly ash), coarse and fine aggregates (crushed rock and sand), water and admixtures. Cement is produced from limestone and gypsum, aggregates and natural sand are extracted from quarries, fly ash is a rest product from electricity generation, and admixtures are specialised chemical formulations that are typically produced by blending selected ingredients. These materials are manufactured by Vossloh's suppliers.

#### Transport (A2)

Most materials and components used to produce concrete sleepers are sourced from suppliers in Australia. Reinforcement steel is sourced from within Australia as well. Local transport (by truck) from Australian supplier to Vossloh is included. For overseas suppliers, transport (by truck) from overseas suppliers to a local port, shipping from overseas ports to Australia and transport (by truck) from Australian ports to site. Transport of raw materials has been included in the LCA based upon actual transport modes and distances relevant to the site, where available.

#### Manufacturing (A3)

Vossloh sleepers are manufactured in dedicated precast concrete factories.

The process starts with placing steel wires in the required positions within the moulds. The wires are anchored at one end and then pulled from the other end using hydraulic jacks. This process prestresses the steel wires, which results in a stronger product (or material savings) compared to non-prestressed reinforced concrete.

Wet concrete is cast into the moulds and vibrated to remove entrapped air from the concrete and thereby achieve the required quality (density and strength). When the concrete has reached sufficient strength, the moulds are removed (and used again). Fastening systems can now be mounted onto the sleepers. Finally, the sleepers are stored in the factory yard, using timber gluts for stable stacking, where the concrete continues to develop its strength.

The “**Construction process stage (A4-A5)**” and “**Use stage (B1-B7)**” have been excluded from the life cycle assessment, as the ready-mix concrete can be used for a range of different applications for which the use scenarios are unknown. The impacts of these stages are best determined at project level.

#### End of Life (C1-C4)

The end-of-life modules for reinforced concrete sleepers are based on generic scenarios. The scenarios included are currently in use and are representative for one of the most probable alternatives.

Module C1 covers demolition of reinforced concrete sleepers at the end of their service life. We have used the end-of-life scenario representative for Australian building & demolition materials based on the National Waste Report 2022 (NWR 2022). This scenario implies that 80% of the reinforced concrete is recycled and the remaining 20% of the reinforced concrete is sent to landfill. Additional (module C3, C4 and D) results for alternative scenarios representing 100% recycling and 100% landfill are declared in Table 15 and Table 16.

Module C2 comprises the transport from the demolition site to a recycling centre or landfill site (80km). Module C3 encompasses the recycling process (i.e. crushing of reinforced concrete; separating steel and concrete), while Module C4 represents disposal of reinforced concrete in a landfill site. The concrete and steel in module C3 reach end-of-waste status when sleepers have been crushed and concrete is stockpiled as “recycled crushed concrete” (RCC) aggregates, while steel is stockpiled or collected in a bin.

We have used the default values from Table 4 in PCR 2019:14 to model the end-of-life impacts for sleepers, based on the product mass defined in Table 1 of this EPD.

Due to high uncertainty in the parameters and lack of data, CO<sub>2</sub>-uptake (carbonation) has not been included at end-of-life.

### Loads and Benefits Beyond the System Boundaries (D)

Module D sits outside the system boundaries and includes any benefits and loads from net flows leaving the product system (that have passed the end-of-waste state). For this EPD, any material collected for recycling and processed in Module C3, is considered to go through to Module D. We have assumed that Recycled Crushed Concrete aggregates (the output of module C3) replace virgin aggregates (crushed rocks) in module D. Similarly, steel scrap separated from concrete in module C3 is assumed to replace virgin steel in module D.

Per sleeper type GB-212-22, module D credits the avoided impacts for 258 kg of crushed aggregates and 6.13kg of virgin steel. The net flow calculation is not affected by fly ash.

Processes	Quantity per sleeper	Unit
Collection process specified by type	323	kg collected separately
	0	kg collected with mixed construction waste
Transport from demolition site to recovery / disposal sites	80	km transport
Recovery system specified by type	0	kg for re-use
	258	kg for recycling
	0	kg for energy recovery
Disposal to landfill	65	kg product or material for final deposition
Assumptions for scenario development	The default values from PCR 2019:14 (v2.0.1) table 4 have been used to model modules C1, C2, C3 and C4	

Table 5: End-of-life scenario parameters

Module and processes	Quantity	Energy carrier / transport means
C1: Demolition/deconstruction of concrete/reinforced concrete	10 kWh/t	Diesel
C2: Transport (for products/materials not to be incinerated)	80 km	16-32 tonne lorry (EURO 5)
C3: Loading and unloading at sorting facility	1.8 kWh/t	Diesel
C3: Mechanical sorting	2.2 kWh/t	electricity
C3: Crushing of concrete	2.0 kWh/t	diesel
C4: Compacting of inert construction waste for landfills (including backfilling)	1.6 kWh/t	Diesel

Table 6: Default data for modelling modules C1, C2, C3 and C4

### Background Data

Vossloh has supplied primary data from their production facility in Geelong, covering the 2021 calendar year. Data pertaining to the product design and composition are representative for the current (2025) period.

Data for cement has been sourced from our supplier's EPD (confidential). Data for admixtures has been sourced from EPDs published by EFCA (EFCA 2021a, 2021b). EPDs based on an old EF version (EF 3.0) have been used as a data source, and it was assessed to yield identical or conservative results compared to using the EF3.1. Data for steel are from AusLCI (Steel, converter, low-alloyed, at plant/RER U/AusSD U), with a -10% correction factor based on our supplier's EN 15804+A1 EPD.

Background data (e.g. for energy and transport processes, and materials/component for which we don't have supplier specific data) have predominantly been sourced from AusLCI and the AusLCI shadow database (v1.42) and ecoinvent (v3.10 cut-off). As a result, the vast majority of the environmental profile of our products is based on life cycle data less than five years old. Background data used is less than 10 years old.

Methodological choices have been applied in line with EN 15804:2012+A2:2019; deviations have been recorded.

### Data quality assessment

Process	Source type	Source	Reference year	Data category	Share of primary data (GWP-GHG; A1-A3)
Manufacturing of sleepers	Collected data	EPD owner	2021	Primary data	0-2%
Generation of electricity used in manufacturing of sleepers	Database	AusLCI v1.42	2023	Primary data	2-7%
Transport of raw materials to manufacturing site	Database	EPD owner	2024	Primary data	2-10%
Production of steel reinforcement wire	Database	AusLCI v1.42 (adjusted)	2023	Secondary data	0%
Production of cement	EPD	Supplier EPD	2023	Primary data, Secondary data	43-65%
Production of coarse aggregates and natural sand	Database	AusLCI v1.42	2023	Secondary data	0%
Production of admixtures	EPD	EFCA EPDs	2021	Proxy data	0%
Other	Database	AusLCI v1.42	2023	Secondary data	0%
<b>Total share of primary data, of GWP-GHG results for A1-A3*</b>					<b>60%</b>

Table 7: Data quality assessment

\* The share of primary data is calculated based on GWP-GHG results. It is a simplified indicator for data quality that supports the use of more primary data, to increase the representativeness of and comparability between EPDs. Note that the indicator does not capture all relevant aspects of data quality and is not comparable across product categories.

The reported share of primary data is associated with uncertainty, as one or more EPDs used as data source lack information on the share of primary data.

This EPD covers a sleeper product from one plant. Vossloh provided energy and waste data for the site for the period January - December 2021. The product designs, concrete mix designs, raw material sources, and supply chain details are current (2025). The concrete ingredients are mixed in the plant and poured into moulds fitted with pre-stressed steel wire. The sleepers are stored in the site's yard where they further develop strength. The EPD covers end-of-life in Australia, although the default factors from the PCR are used to model module C (see Table 6). Background data was sourced from EPDs, the AusLCI v1.42 and ecoinvent v3.10 databases. Data quality was assessed according to EN 15804:2012+A2:2019, Annex E (Table E.1 - UN Environment Global Guidance on LCA database development).

The use of very poor and poor data in module A1-A3 is disclosed in Table 8, together with fair data with more than 30% impact.

Data set	Criteria	Data quality level	Reason for level	Reason for using	Relevance
Production of steel reinforcement wire	Geographical	Fair	Generic background data	Best available data	>70% of ADPm&m; 25-30% of GWP; 0-30% of other core impact indicators
	Technical	Fair			

Table 8: Data quality information

### Key assumptions

The key choices and assumptions in the LCA are:

- The product design and concrete composition is provided by Vossloh and has been accepted as is.
- Cement and admixture data are taken from supplier-specific and generic EPDs respectively. This is expected to greatly improve the accuracy of Vossloh's EPD results. The WDP result in this EPD is heavily influenced by the WDP value reported in our cement supplier's EPD, which we believe may be incorrect. The cement supplier EPD contains an error in the declared waste parameter results. The waste values have been reduced by a factor 1 000 to avoid the expected unit error affecting our EPD.
- Additional environmental impact indicators are not declared in the admixture EPDs, which results in underreporting of these indicators.
- Allocation approaches may have a material effect on sleeper products containing fly ash.
- For core processes, electricity has been modelled using adjusted AusLCI data to represent the estimated residual electricity grid mix in Victoria, Australia. This is done by removing renewables from the Australian Energy Statistics 2024 data for the electricity mix in FY23 (Table O.3). The GWP-GHG of the electricity is 1.00 kg CO<sub>2</sub>e / kWh. The proxy residual grid mix is made up of brown coal (94.2%), natural gas (5.1%), and oil products (0.8%). Given the limited contribution of manufacturing electricity consumption to the GWP emissions, the selection of market-based or location-based reporting only has a minor (<2%) impact on the carbon footprint results.
- For other processes, electricity has been modelled using a location-based approach, mostly based on Australian average electricity generation as per AusLCI.
- The end-of-life scenario is based on landfill and recycling rates for building and demolition materials in Australia, as per the National Waste Report 2022 (NWR 2022), table 37. The default values from Table 4 in PCR 2019:14 have been used to model the end-of-life impacts for sleepers, based on the product mass defined in Table 1 of this EPD.

### Cut-off criteria

- The cut-off criteria applied are 1% of renewable and non-renewable primary energy usage, 1% of the total mass input of a process and 1% of environmental impacts.
- The contribution of capital goods (production equipment and infrastructure) and personnel is excluded, as these processes are non-attributable and they contribute less than 10% to GWP-GHG.

### Allocation

The materials, products and processes in the life cycle of Vossloh's products that require allocation are:

- Co-production of GB-212-22 and other sleeper products: Vossloh manufactures a range of sleeper products at its sites. Production waste and energy use for sleeper production has been allocated to the products based on a mass basis (total tonnage of products produced). Timber gluts have been assigned to the products based on the number of sleepers produced.
- Co-production of sleepers and steel offcuts collected for recycling. The steel offcuts are a waste output from the production process (even though they may have a positive value), thus requiring waste allocation. We have applied cut-off allocation, assigning all impacts to the sleepers. This approach is conservative, respects the main purpose of the process, reflects the polluter-pays-principle, and ensures consistency in allocation with scrap entering the product system.
- Scrap used in the production of steel reinforcement products: The process used in the model comes with 12.5% scrap input, estimated to be made up of 80% post-consumer and 20% pre-consumer scrap. The transport of scrap, sorting, and pressing is included within the system boundary of the receiving life cycle, but the inputs are treated as burden free (without prior environmental impacts from the previous life cycle). The use of cut-off allocation for incoming scrap is justified in the LCA and has no material effect on the results.
- Co-production of electricity and fly-ash: As around half of all the fly ash generated in Australia is not used but stored in ponds, economic allocation was applied with zero value assigned to the fly ash. In effect, all environmental impacts of the power plant have been allocated to the main product: electricity. Fly ash has only received the burdens of transport to our site.

## Life Cycle Assessment (LCA) indicators

An LCA serves as the foundation for this EPD. An LCA analyses the production systems of a product. It provides comprehensive evaluations of all upstream and downstream energy inputs and outputs. The results are provided in a form which covers a range of environmental impact categories.

Core indicators	Acronym	Unit
Climate change – total	GWP-total	kg CO <sub>2</sub> equivalent
Climate change – fossil	GWP-fossil	kg CO <sub>2</sub> equivalent
Climate change – biogenic	GWP-biogenic	kg CO <sub>2</sub> equivalent
Climate change – land use and land use change	GWP-luluc	kg CO <sub>2</sub> equivalent
Ozone layer depletion	ODP	kg CFC-11 equivalent
Acidification	AP	mol H <sup>+</sup> equivalent
Eutrophication aquatic freshwater	EP-freshwater	kg P equivalent
Eutrophication aquatic marine	EP-marine	kg N equivalent
Eutrophication terrestrial	EP-terrestrial	mol N equivalent
Photochemical ozone formation	POCP	kg NMVOC equivalent
Abiotic depletion potential – elements <sup>1</sup>	ADP minerals & metals	kg Sb equivalent
Abiotic depletion potential – fossil fuels <sup>1</sup>	ADP fossil	MJ, net calorific value
Water use <sup>1</sup>	WDP	m <sup>3</sup> world equivalent deprived
Additional indicators	Acronym	Unit
Global Warming Potential – Greenhouse gases	GWP-GHG	kg CO <sub>2</sub> equivalent
Particulate matter emissions	PM	disease incidence
Ionising radiation, human health <sup>2</sup>	IRP	kBq U235 equivalent
Ecotoxicity (freshwater) <sup>1</sup>	ETP-fw	CTUe
Human toxicity, cancer effects <sup>1</sup>	HTP-c	CTUh
Human toxicity, non-cancer effects <sup>1</sup>	HTP-nc	CTUh
Land use related impacts / soil quality <sup>1</sup>	SQP	- (dimensionless)
Additional GHG indicator	Acronym	Unit
<b>Carbon footprint in line with IPCC AR5<sup>3</sup></b>	<b>GWP-GHG (IPCC AR5)</b>	<b>kg CO<sub>2</sub> eq</b>

Table 9: Environmental indicators legend (EN 15804+A2)

<sup>1</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

<sup>3</sup> **Note regarding various GWP indicators:** GWP-total is calculated using the European Union's Joint Research Centre's characterisation factors (CFs) based on the "EF 3.1 package" for CFs to be used in the EU's Product Environmental Footprint (PEF) framework. CFs listed by JRC include indirect radiative forcing, which results in higher numerical Global Warming Potential (GWP) values than the CFs in the internationally accepted (IPCC 2021). The GWP-GHG indicator is identical to GWP-total except that the CFs for biogenic CO<sub>2</sub> are set to zero. The GWP-GHG indicator in PCR 2019:14 v2.0.1 differs from the GWP-GHG in earlier (pre v1.3) PCR 2019:14 versions. The IPCC AR 5 (IPCC 2013) indicator is determined using the IPCC AR5 Global Warming Potentials (GWP) with a 100-year time horizon. This indicator is aligned with Australia's greenhouse gas reporting frameworks.

Parameter	Acronym	Unit
<b>Parameters describing resource use</b>		
Use of renewable primary energy excluding renewable primary energy resources used as raw materials	PERE	MJ <sub>NCV</sub>
Use of renewable primary energy resources used as raw materials	PERM	MJ <sub>NCV</sub>
Total use of renewable primary energy resources	PERT	MJ <sub>NCV</sub>
Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials	PENRE	MJ <sub>NCV</sub>
Use of non-renewable primary energy resources used as raw materials	PENRM	MJ <sub>NCV</sub>
Total use of non-renewable primary energy resources	PENRT	MJ <sub>NCV</sub>
Use of secondary material	SM	kg
Use of renewable secondary fuels	RSF	MJ <sub>NCV</sub>
Use of non-renewable secondary fuels	NRSF	MJ <sub>NCV</sub>
Use of net fresh water	FW	m <sup>3</sup>
<b>Waste categories</b>		
Hazardous waste disposed	HWD	kg
Non-Hazardous waste disposed	NHWD	kg
Radioactive waste disposed	RWD	kg
<b>Output flows</b>		
Components for re-use	CRU	kg
Materials for recycling	MFR	kg
Materials for energy recovery	MER	kg
Exported energy	EE	MJ

Table 10: Legend for parameters describing resource use, waste and output flows

Indicator	Acronym	Unit
Global warming potential	GWP	kg CO <sub>2</sub> equivalent
Ozone layer depletion potential	ODP	kg CFC-11 equivalent
Acidification potential	AP	kg SO <sub>2</sub> equivalent
Eutrophication potential	EP	kg PO <sub>4</sub> <sup>3-</sup> equivalent
Photochemical oxidation (Photochemical ozone creation) potential	POCP	kg ethylene equivalent
Abiotic depletion potential - elements	ADPE	kg Sb equivalent
Abiotic depletion potential – fossil fuels	ADPF	MJ <sub>NCV</sub>

Table 11: Legend for EN 15804+A1 indicators

## Environmental performance

The following section presents the results for each Life Cycle Assessment module. The results have been calculated based on the EFv3.1 set of characterisation factors with SimaPro software v9.6.0.1.

Water flows have been disaggregated using the 36 ALCAS water catchments for which characterisation factors are available for both Pfister WSI and the AWARE method.

To separate the use of primary energy into energy used as raw material and energy used as energy carrier, Option B from Annex 3 of PCR 2019:14 has been applied. In option B, the energy used as raw material is declared as an input to the module where it enters the product system (often in module A1) and as an output from the product system if it exits the product system as useful energy (often from modules A5 or C3).

(Note: As module A5 is not declared, balancing has occurred in modules A1-A3.) Energy content that is wasted (e.g. in landfill), remains as part of the indicator for energy used for raw materials, and is not reported as an input of energy used for energy carriers.

Please consider the following mandatory statements when interpreting the results:

***” The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks”.***

***“The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3)”.***

# Environmental product declaration

Pre-stressed concrete sleeper GB-212-22



Environmental Indicator	Unit	Module A1-A3	Module C1	Module C2	Module C3	Module C4	Module D
<b>Core Indicators</b>							
<b>GWP-total</b>	kg CO <sub>2</sub> -eq.	6.95E+01	1.01E+00	3.56E+00	7.47E-01	3.22E-02	-7.66E+00
<b>GWP-fossil</b>	kg CO <sub>2</sub> -eq.	6.82E+01	1.01E+00	3.56E+00	7.46E-01	3.22E-02	-7.65E+00
<b>GWP-biogenic</b>	kg CO <sub>2</sub> -eq.	1.31E+00	6.68E-05	2.39E-04	9.95E-04	2.14E-06	-3.01E-03
<b>GWP-luluc</b>	kg CO <sub>2</sub> -eq.	5.63E-03	4.82E-07	1.60E-06	1.60E-07	1.54E-08	7.88E-05
<b>ODP</b>	kg CFC11-eq.	4.14E-06	1.61E-07	6.67E-07	4.97E-08	5.15E-09	-8.37E-08
<b>AP</b>	mol H+ eq.	5.67E-01	1.11E-02	1.25E-02	5.09E-03	3.54E-04	-2.60E-02
<b>EP-freshwater</b>	kg P eq.	5.57E-02	1.34E-07	2.37E-07	2.87E-07	4.29E-09	5.91E-04
<b>EP-marine</b>	kg N eq.	1.86E-01	4.82E-03	4.57E-03	1.75E-03	1.54E-04	-3.62E-03
<b>EP-terrestrial</b>	mol N eq.	2.08E+00	5.28E-02	5.03E-02	1.92E-02	1.69E-03	-6.23E-02
<b>POCP</b>	kg NMVOC eq.	5.40E-01	1.41E-02	1.22E-02	5.09E-03	4.51E-04	-1.78E-02
<b>ADP minerals &amp; metals<sup>1</sup></b>	kg Sb eq.	3.80E-04	1.19E-09	3.11E-09	3.77E-10	3.80E-11	-7.89E-05
<b>ADP fossil<sup>1</sup></b>	MJ (NCV)	8.40E+02	1.41E+01	4.75E+01	1.06E+01	4.50E-01	-7.44E+01
<b>WDP<sup>1</sup></b>	m <sup>3</sup> world eq. deprived	3.04E+02	8.88E-02	3.05E-01	5.32E-02	2.84E-03	-1.40E+01
<b>Additional indicators</b>							
<b>GWP-GHG</b>	kg CO <sub>2</sub> -eq.	6.87E+01	1.01E+00	3.56E+00	7.47E-01	3.22E-02	-7.65E+00
<b>PM</b>	Disease incidence	3.65E-06	2.93E-07	1.17E-07	1.04E-07	9.38E-09	-4.33E-07
<b>IRP<sup>2</sup></b>	kBq U235 eq.	2.16E-01	2.05E-05	7.22E-05	6.53E-06	6.57E-07	3.34E-02
<b>ETP-fw<sup>1</sup></b>	CTUe	3.25E+02	3.11E+00	9.26E+00	9.99E-01	9.95E-02	-2.45E+02
<b>HTP-c<sup>1</sup></b>	CTUh	1.35E-08	3.89E-11	9.87E-12	3.39E-11	1.25E-12	-8.84E-07
<b>HTP-nc<sup>1</sup></b>	CTUh	5.66E-07	2.07E-10	2.99E-10	1.98E-10	6.63E-12	4.44E-07
<b>SQP<sup>1</sup></b>	-	7.09E+02	6.74E-02	3.36E-01	1.22E+00	2.16E-03	-5.97E+01
<b>Carbon footprint</b>							
<b>GWP-GHG (IPCC AR5)</b>	<b>kg CO<sub>2</sub> eq</b>	69	1.0	3.6	0.75	0.03	-7.67

Table 12: Environmental indicators EN 15804+A2, GB-212-22, per unit (excluding fastenings)

# Environmental product declaration

## Pre-stressed concrete sleeper GB-212-22



Footnotes (Table 12):

<sup>1</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

Parameter	Unit	Module A1-A3	Module C1	Module C2	Module C3	Module C4	Module D
PERE	MJ <sub>NCV</sub>	7.01E+01	2.17E-02	6.59E-02	4.50E-01	6.96E-04	-8.15E+00
PERM	MJ <sub>NCV</sub>	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ <sub>NCV</sub>	7.01E+01	2.17E-02	6.59E-02	4.50E-01	6.96E-04	-8.15E+00
PENRE	MJ <sub>NCV</sub>	8.49E+02	1.41E+01	4.75E+01	1.06E+01	4.50E-01	-7.44E+01
PENRM	MJ <sub>NCV</sub>	4.89E+00	0.00E+00	0.00E+00	-3.91E+00	0.00E+00	0.00E+00
PENRT	MJ <sub>NCV</sub>	8.54E+02	1.41E+01	4.75E+01	6.69E+00	4.50E-01	-7.44E+01
SM	kg	1.32E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ <sub>NCV</sub>	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ <sub>NCV</sub>	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	6.47E-01	2.04E-03	7.01E-03	1.49E-03	6.51E-05	-6.99E+01
HWD	kg	5.33E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NHWD	kg	1.92E+00	6.43E-05	1.95E-04	1.34E-03	6.46E+01	-5.33E-03
RWD	kg	4.48E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CRU	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	kg	3.74E+01	0.00E+00	0.00E+00	2.58E+02	0.00E+00	0.00E+00
MER	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 13: Parameters, GB-212-22, per unit (excluding fastenings)

# Environmental product declaration

Pre-stressed concrete sleeper GB-212-22



Environmental Indicator	Unit	Module A1-A3	Module C1	Module C2	Module C3	Module C4	Module D
<b>GWP</b>	kg CO <sub>2</sub> eq	6.84E+01	1.00E+00	3.55E+00	7.44E-01	3.21E-02	-7.62E+00
<b>ODP</b>	kg CFC11 eq	9.71E-07	1.27E-07	5.27E-07	3.93E-08	4.07E-09	-6.92E-08
<b>AP</b>	kg SO <sub>2</sub> eq	1.92E-01	7.87E-03	9.12E-03	2.80E-03	2.52E-04	-1.67E-02
<b>EP</b>	kg PO <sub>4</sub> <sup>3-</sup> eq	3.40E-02	1.62E-03	1.57E-03	5.90E-04	5.17E-05	1.38E-03
<b>POCP</b>	kg C <sub>2</sub> H <sub>4</sub> eq	1.91E-02	7.71E-04	2.71E-04	2.63E-04	2.47E-05	-2.75E-03
<b>ADPE</b>	kg Sb eq	7.24E-06	1.20E-09	3.16E-09	6.90E-10	3.85E-11	-7.89E-05
<b>ADPF</b>	MJ <sub>NCV</sub>	8.52E+02	1.41E+01	4.74E+01	1.06E+01	4.50E-01	-7.57E+01

Table 14: EN 15804+A1 indicators\*, GB-212-22, per unit (excluding fastenings)

\* Note: the indicators and characterisation methods are from EN 15804:2012+A1:2013, but other LCA rules (system boundaries, allocation, etc.) are according to EN 15804:2012+A2:2019; i.e., the results of the "A1 indicators" shall not be claimed to be compliant with EN 15804:2012+A1:2013

# Environmental product declaration

Pre-stressed concrete sleeper GB-212-22



## Additional scenarios

Environmental Indicator	Unit	Module C3	Module C4	Module D	Module C3	Module C4	Module D
<b>Core Indicators</b>		<b>100% recycling</b>			<b>100% landfill</b>		
<b>GWP-total</b>	kg CO <sub>2</sub> -eq.	9.34E-01	0.00E+00	-3.04E+01	0.00E+00	1.61E-01	3.12E+00
<b>GWP-fossil</b>	kg CO <sub>2</sub> -eq.	9.32E-01	0.00E+00	-3.04E+01	0.00E+00	1.61E-01	3.12E+00
<b>GWP-biogenic</b>	kg CO <sub>2</sub> -eq.	1.24E-03	0.00E+00	-1.14E-02	0.00E+00	1.07E-05	-7.72E-04
<b>GWP-luluc</b>	kg CO <sub>2</sub> -eq.	2.00E-07	0.00E+00	3.16E-04	0.00E+00	7.71E-08	-4.54E-05
<b>ODP</b>	kg CFC11-eq.	6.21E-08	0.00E+00	-3.25E-07	0.00E+00	2.57E-08	4.69E-09
<b>AP</b>	mol H+ eq.	6.36E-03	0.00E+00	-1.03E-01	0.00E+00	1.77E-03	1.02E-02
<b>EP-freshwater</b>	kg P eq.	3.58E-07	0.00E+00	2.37E-03	0.00E+00	2.14E-08	-3.40E-04
<b>EP-marine</b>	kg N eq.	2.19E-03	0.00E+00	-1.43E-02	0.00E+00	7.71E-04	1.30E-03
<b>EP-terrestrial</b>	mol N eq.	2.39E-02	0.00E+00	-2.48E-01	0.00E+00	8.45E-03	2.73E-02
<b>POCP</b>	kg NMVOC eq.	6.36E-03	0.00E+00	-7.09E-02	0.00E+00	2.26E-03	8.00E-03
<b>ADP minerals &amp; metals<sup>1</sup></b>	kg Sb eq.	4.71E-10	0.00E+00	-3.17E-04	0.00E+00	1.90E-10	4.51E-05
<b>ADP fossil<sup>1</sup></b>	MJ (NCV)	1.32E+01	0.00E+00	-2.94E+02	0.00E+00	2.25E+00	2.45E+01
<b>WDP<sup>1</sup></b>	m <sup>3</sup> world eq. deprived	6.65E-02	0.00E+00	-5.40E+01	0.00E+00	1.42E-02	-4.50E-01
<b>Additional indicators</b>		<b>100% recycling</b>			<b>100% landfill</b>		
<b>GWP-GHG</b>	kg CO <sub>2</sub> -eq.	9.34E-01	0.00E+00	-3.04E+01	0.00E+00	1.61E-01	3.11E+00
<b>PM</b>	Disease incidence	1.30E-07	0.00E+00	-1.73E-06	0.00E+00	4.69E-08	2.09E-07
<b>IRP<sup>2</sup></b>	kBq U235 eq.	8.16E-06	0.00E+00	1.34E-01	0.00E+00	3.29E-06	-1.93E-02
<b>ETP-fw<sup>1</sup></b>	CTUe	1.25E+00	0.00E+00	-9.82E+02	0.00E+00	4.98E-01	1.40E+02
<b>HTP-c<sup>1</sup></b>	CTUh	4.24E-11	0.00E+00	-3.54E-06	0.00E+00	6.23E-12	5.06E-07
<b>HTP-nc<sup>1</sup></b>	CTUh	2.48E-10	0.00E+00	1.78E-06	0.00E+00	3.32E-11	-2.55E-07
<b>SQP<sup>1</sup></b>	-	1.52E+00	0.00E+00	-2.33E+02	0.00E+00	1.08E-02	8.16E+00
<b>Carbon footprint</b>		<b>100% recycling</b>			<b>100% landfill</b>		
<b>GWP-GHG (IPCC AR5)</b>	kg CO <sub>2</sub> eq	9.34E-01	0.00E+00	-3.05E+01	0.00E+00	1.61E-01	3.13E+00

Table 15: Environmental indicators EN 15804+A2, 100% end-of-life scenarios, GB-212-22, per unit (excluding fastenings)

# Environmental product declaration

## Pre-stressed concrete sleeper GB-212-22



Footnotes (Table 15):

<sup>1</sup> The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

<sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and some construction materials, is also not measured by this indicator.

Parameter	Unit	Module C3	Module C4	Module D	Module C3	Module C4	Module D
<b>Parameters</b>		<b>100% recycling</b>			<b>100% landfill</b>		
<b>PERE</b>	MJ <sub>NCV</sub>	5.62E-01	0.00E+00	-3.25E+01	0.00E+00	3.48E-03	3.64E+00
<b>PERM</b>	MJ <sub>NCV</sub>	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>PERT</b>	MJ <sub>NCV</sub>	5.62E-01	0.00E+00	-3.25E+01	0.00E+00	3.48E-03	3.64E+00
<b>PENRE</b>	MJ <sub>NCV</sub>	1.32E+01	0.00E+00	-2.94E+02	0.00E+00	2.25E+00	2.45E+01
<b>PENRM</b>	MJ <sub>NCV</sub>	-4.89E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>PENRT</b>	MJ <sub>NCV</sub>	8.36E+00	0.00E+00	-2.94E+02	0.00E+00	2.25E+00	2.45E+01
<b>SM</b>	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>RSF</b>	MJ <sub>NCV</sub>	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>NRSF</b>	MJ <sub>NCV</sub>	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>FW</b>	m <sup>3</sup>	1.86E-03	0.00E+00	-2.80E+02	0.00E+00	3.26E-04	3.98E+01
<b>HWD</b>	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>NHWD</b>	kg	1.67E-03	0.00E+00	-2.06E-02	0.00E+00	3.23E+02	0.00E+00
<b>RWD</b>	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>CRU</b>	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>MFR</b>	kg	3.23E+02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>MER</b>	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
<b>EE</b>	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Table 16: Parameters, 100% end-of-life scenarios, GB-212-22, per unit (excluding fastenings)

## Abbreviations

Abbreviation	Definition
AusLCI	Australian Life Cycle Inventory (database)
CEN	European Committee for Standardization
CPC	Central Product Classification
EF	Environmental Footprint
EFCA	European Federation of Concrete Admixtures Associations
EN	European Norm (Standard)
EPD	Environmental Product Declaration
GPI	General Programme Instructions
ISO	International Organization for Standardization
kg	kilogram
km	kilometre
kWh	kilo Watt hour
LCA	Life Cycle Assessment
m <sup>3</sup>	cubic metre
ND	Not Declared
NWR	National Waste Report
OHS	Operational Health and Safety
PCR / c-PCR	Product Category Rules / complimentary Product Category Rules
SVHC	Substances of Very High Concern
t	tonne
UN	United Nations

## Version history

Version	Notes
1	Original version of the EPD, published 2025-09-30

## References

- AES 2024 Australian Energy Statistics 2024 - Table O. Australian Government. Department of Climate Change, Energy, the Environment and Water
- AusLCI 2023 Australian Life Cycle Inventory database v1.42 published by the Australian Life Cycle Assessment Society (ALCAS), 2023
- ECHA 2025 European Chemicals Association, Candidate List of substances of very high concern for Authorisation, published in accordance with Article 59(10) of the REACH Regulation, Helsinki Accessed on 1 July 2025 from: <https://echa.europa.eu/candidate-list-table>
- EFCA 2021a EPD of Set Accelerators, IBU EPD Declaration number EPD-EFC-20210194-IBG1-EN, issued 2021-12-16, based on EN 15804 and PCR for concrete admixtures; EPD owner: EFCA - European Federation of Concrete Admixtures Associations
- EFCA 2021b EPD of Plasticizer and superplasticizer, IBU EPD Declaration number EPD-EFC-20210198-IBG2-EN, issued 2021-12-16, based on EN 15804 and PCR for concrete admixtures; EPD owner: EFCA - European Federation of Concrete Admixtures Associations
- Environdec 2025a International EPD System, General Programme Instructions for the International EPD System, Version 5.0.1, 27 February 2025
- Environdec 2025b c-PCR-003 Concrete and concrete elements (EN 16757:2022), Product category rules for concrete and concrete elements, version 8 April 2025
- EN 15804+A2 EN 15804:2012+A2:2019/AC:2021, Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products, European Committee for Standardization (CEN), Brussels, August 2021
- EN 15804+A1 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products, European Committee for Standardization (CEN), Brussels, November 2013
- EN 15941 EN 15941:2024, Sustainability of construction works – Data quality for environmental assessment of products and construction work – Selection and use of data, European Committee for Standardization (CEN), Brussels, March 2024
- EN 16757 EN 16757:2022, Sustainability of construction works – Environmental product declarations - Product Category Rules for concrete and concrete elements, European Committee for Standardization (CEN), Brussels, October 2022
- EPDA 2023 EPD Australasia Limited, Instructions of the Australasian EPD Programme v4.2 - A regional annex to the general programme instructions of the International EPD® System, 2023-04-12
- IPCC 2013 Myhre, G., D. Shindell, F.-M. Bréon, W. Collins, J. Fuglestedt, J. Huang, D. Koch, J.-F. Lamarque, D. Lee, B. Mendoza, T. Nakajima, A. Robock, G. Stephens, T. Takemura and H. Zhang, 2013: Anthropogenic and Natural Radiative Forcing. In: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA
- IPCC 2021 Summary for Policymakers. In: Climate Change 2021: The Physical Science Basis. Contribution of Working Group I to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change [Masson-Delmotte, V., P. Zhai, A. Pirani, S.L. Connors, C. Péan, S. Berger, N. Caud, Y. Chen, L. Goldfarb, M.I. Gomis, M. Huang, K. Leitzell, E. Lonnoy, J.B.R. Matthews, T.K. Maycock, T. Waterfield, O. Yelekçi, R. Yu, and B. Zhou (eds.)]. Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA
- ISO 14025 Environmental labels and declarations - Type III environmental declarations - Principles and procedures. International Organization for Standardization, Geneva, Switzerland, 2006
- ISO 14040 Environmental management - Life cycle assessment - Principles and framework. International Organization for Standardization, Geneva, Switzerland, 2006
- ISO 14044 Environmental management - Life cycle assessment - Requirements and guidelines. International Organization for Standardization, Geneva, Switzerland, 2006
- NOHSC 2004 Australian Government, National Occupational Health and Safety Commission (NOHSC), Approved Criteria for Classifying Hazardous Substances, 3rd Edition, October 2004

# Environmental product declaration

Pre-stressed concrete sleeper GB-212-22

**vossloh**



## Contact information

Vossloh  
GPO Box 606  
BRISBANE QLD 4001  
Australia  
+61 7 3328 5400  
VSTA@vossloh.com

**vossloh**

**This publication provides general information only and is no substitute for professional engineering advice. No representations or warranties are made regarding the accuracy, completeness or relevance of the information provided. Users must make their own determination as to the suitability of this information or any Vossloh product for their specific circumstances.**

**Vossloh accepts no liability for any loss or damage resulting from any reliance on the information provided in this publication.**

**© 2025 Vossloh Australia Pty Ltd, ABN 52 100 797 699 and Vossloh Sleeper Technologies Australia Pty Ltd (part of the Vossloh Group), ABN 72 008 925 031**

**All rights reserved.**